

OWNER'S MANUAL EV522T



RETAIN OWNER'S MANUAL FOR FUTURE REFERENCE



Service call 1300 796 636 www.evofitness.net.au

TABLE OF CONTENTS

SAFETY	- p1~p2
WARM-UP & COOL DOWN	 p3
JNPACKING & ASSEMBLY	 p4
ASSEMBLY DRAWING	 p5-p6
FOLDING INSTRUCTION	p7
INCLINE MANUAL	- p8
COMPUTER OPERATIONS Control panel function, control panel operation	- p9-p12
BELT ADJUSTMENT	p13
CARE & MAINTENANCE	 p14
UBRICATION MAINTENANCE	- p15
ROUBLE SHOOTING	- p16
EXPLODED DRAWING	- - p17
PARTS LIST	p18-p19

SAFETY

IMPORTANT: Read all instructions and warnings before using the treadmill

WARNING!: Do not attempt to use this treadmill with a voltage adapter. Do not attempt to use this treadmill with an extension cord.

CONSULT A PHYSICIAN IMMEDIATELY

Warning: before starting any exercise program consult your physician. This is especially important for individuals over the age of 35 or persons with pre-existing health problems. Read all instructions before using any fitness equipment. We assume no responsibility for personal injury damage sustained by or through the use of this treadmill.

IMPORTANT SAFETY INSTRUCTIONS

- Obtain a medical exam before beginning any exercise program.
- Keep children and pets away from the treadmill. Disabled persons must be supervised while using the treadmill.
- Stop exercising if you feel faint, dizzy, or experience pain at any time while exercising and consult your physician.
- Clip the SAFETY KEY onto your clothing and carefully test it prior to using the treadmill.
- Disconnect all power before servicing the treadmill.
- Connect the treadmill to a properly grounded outlet only.
- Do not operate treadmill in damp or wet locations.
- This treadmill is for home use only.
- Remove the SAFETY KEY when not in use.
- Do not operate the treadmill if 1. The power cord is damaged; 2. The treadmill is not working properly;
 3. The treadmill has been dropped or damaged.
- Inspect the treadmill for worn or loose components before each use.
- Do not use the treadmill outdoors.
- Read and understand this owner's manual completely before using the treadmill.
- Read and understand all warnings posted on the treadmill and in this owner's manual.
- Do not wear loose or dangling clothing while using the treadmill.
- Always wear proper footwear on or around exercise equipment.
- Set up and operate the treadmill on a solid, level surface. Do not operate in recessed areas or on plush carpet.
- Provide the following clearances: 100cm at each side, 200cm at the back and enough room for safe access and passage at the front of the treadmill.
- Do not modify the treadmill in any way.

SAFETY

TARGET HEART RATE ZONE

	170	5100	\vdash	_	_	_	_			IIGH
	150	166	_		_		_		1	
-	120	146	162						-177	PPE
V		117	143	157						-
m			114	139	153				Lo	
m				111	135	149			-	
Α					108	131	145			
BEATS/MIN						105	128	140		
>							102	124	136	
=	-							99	120	132
~									96	116
										93
AGE	20	25	30	35	40	45	50	55	60	65

Iarget Heart Rate ∠one 220-your age =maximum heart zone You do not want to workout at your maximum heart rate. The recommended Heart Rate Zone is a percentage of your maximum heart rate. Between 60% and 75% of your maximum heart rate.

Lower limit of Target Heart Rate Zone =maximum heart rate X 0.6

Upper limit of Target Heart Rate Zone =Maximum heart rate X0.75

(This is recommended by the American Heart Association. Before starting exercise program, please consult your physician to understand your physical situation)

HOW OFTEN SHOULD YOU EXERCISE:

You should exercise three to four times a week to improve your cardiovascular and muscle fitness.

HOW HARD SHOULD YOU EXERCISE:

Intensity of exercise is reflected in your heart rate. Exercise must be sufficiently rigorous to strengthen your heart muscle and condition your cardiovascular system. Only your doctor can prescribe the target training heart range for you. Before starting any exercise program consult your physician.

HOW LONG SHOULD YOU EXERCISE:

Sustained exercise conditions your heart, lungs and muscles. The longer you are able to sustain exercise within your target heart range, the greater the aerobic benefits.

BEGINNER TREADMILL PROGRAM

	EXERTION LEVEL	DURATION
WEEK 1	Easy	6~12 minutes
WEEK 2	Easy	10~16 minutes
WEEK 3	Moderate	14~20 minutes
WEEK 4	Moderate	18~24 minutes
WEEK 5	Moderate	22~28 minutes
WEEK 6	Slightly higher or slightly lower	20 minutes
WEEK 7	Add interval training	3 minutes at moderate exertion with 3 minutes at higher exertion for 24 minutes

WARM-UP & COOL DOWN

WARM- UP& COOL-DOWN

A successful exercise program consists of a warm up, aerobic exercise, and a cool down. Warming up is an important part of your workout, and should begin every session. It prepares your body for more strenuous exercise by heating up and stretching out your muscles. At the end of your workout, repeat these exercises to reduce sore muscle problems. We suggest the following warm-up and cool-down exercises:



Head rolls

Rotate your head to the right for one count, feeling the stretch up the left side of your neck. Next rotate your head back for one count, stretching your chin to the ceiling and letting your mouth open. Rotate your head to the left for one count, and finally, drop your head to your chest for one count.



Toe touches

Slowly bend forward from your waist, letting your back and shoulder relax as you stretch toward your toes. Reach down as far as you can and hold for 15 seconds.



Shoulder lifts

Lift your right shoulder up toward your ear for one count. Then lift your left shoulder up for one count as you lower your right shoulder.



Quadriceps stretch

With one hand against a wall for balance, reach behind you and pull your right foot up. Bring your heel as close to your buttocks as possible. Hold for 15 counts and repeat with left foot up.



Side stretches

Open your arms to the side and continue lifting them until they are over your head. Reach your right arm as far upward toward the ceiling as you can for one count. Feel the stretch up your right side. Repeat this action with your left arm



Hamstring stretches

Sit with your right leg straight in front of you. Straighten your leg out while trying to hold on to your outstretched leg with your hand. Starting up with your back straight. Slowly exhale and try to bring your chest to the knee of your outstretched leg. Hold, then repeat on the other side for 15 seconds.



Inner thigh stretch

Sit with the soles of your feet together with your knees pointing outward. Pull your feet as close into your groin as possible. Gently push your knees toward the floor. Hold for 15 counts



Calf/achilles stretch

Lean against a wall with your left leg in front of the right and your arms forward. Keep your right leg straight and the left foot on the floor; then bend the left leg and lean forward by moving your hips toward the wall. Hold, then repeat on the other side for 15 seconds.

UNPACKING & ASSEMBLY


WARNING!: Use extreme caution when assembling the treadmill. Failure to do so could result in injury **NOTE:** Each step number in the assembly instructions tells you what you will be doing. Read and understand instructions thoroughly before assembling the treadmill.

- 1. Unpack the carton and place all separate parts outside the carton.
- 2. Tear open the carton as the picture is showing, fold up the treadmill.
- 3. Hold on to the roller cover with two hands and move the treadmill forward as the picture is showing.

Failure to follow this procedure may result in serious injury due to the pinch point area on the front frame near the motor cover.




Check the following items are present. If any of the parts are missing, contact 1300796636.

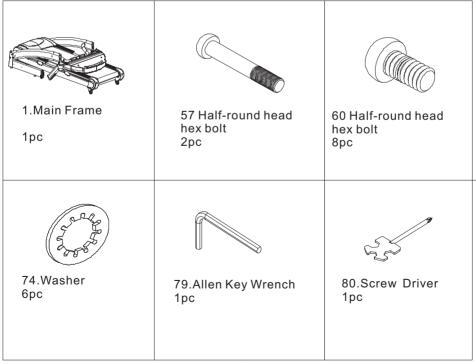


ASSEMBLY DRAWING


Step 1



Step 2

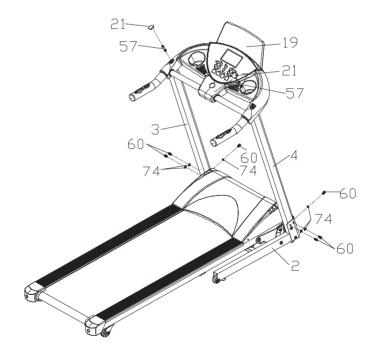

Step 3



 $\begin{tabular}{ll} \textbf{Note}: \textbf{Please check that all of the parts are assembled correctly} & \textbf{and the plug is fitted into wall correctly} \\ \end{tabular}$


Folding instruction



Step 1

Lift up the machine deck and push forward until you hear a "click" which means that the safety casing has locked into the pneumatic cylinder.

Unfolding instruction




Step 2

Push the deck slightly forward and kick lightly on the center of the pneumatic cylinder.
Allow the deck to slowly fall to the floor.

INCLINE MANUAL



PICTURE 1



PICTURE 2

INCLINE INSTRUCTIONS:

"INCLINE+"、 "INCLINE-" and "+" 、 "-" on left handrail are the incline increase and decrease buttons .

To adjust the incline while the treadmill is running you can also press the incline shortcut keys on the console.

COMPUTER OPERATIONS

CONTROL PANEL FUNCTION

Window display: 1 LCD window

CALORIES: Indicates stimated calories burnt

PULSE: estimated heart rate SPEED: Indicates kph in 0.1 STOP: Stop the treadmill

increments

INCLINE: Indicates incline in percent ofgrade in 1% increments

DISTANCE: Indicates km travelled in 0.1 increment

TIME: Indicates time you workout.

can be set to countdown

MODE: Enter programs selection,

enter time setting, push 3 seconds for scanning

Prog: Press Prog button and choose

from "0.8" manual mode to "P1-P12", "Fat" model and then manual normal model.

Mode: When the treadmill is not running, press the mode button to choose countdown modes:

"TIME"(H-1) "DISTANCE"(H-2) and "CALORIE"(H-3) and then normal model

ONE-TOUCH SPEED 3,6,9:Used to reach ideal speed

ONE-TOUCH INCLINE 3,6,9: Used to reach ideal incline

PROGRAM AND START INSTRUCTION

1. Program instruction

a): One manual program includes normal mode, time count down mode, distance count down mode and calories count down mode:

b):12 automatic programs: P01, P02, P03, P04, P05, P06, P07, P08, , , P12;

2. Start instruction

a): Put the safety key on the holder of the console, beeper beeps once, computer will display, then you are ready to go into the manual mode.

b): Press the start key, the middle window will indicate 5-4-3-2-1, beeper will beep five times, then you are ready to start your treadmill;

3. Manual Model

a): Turn on the power, enter normal mode under manual program;

b): Manual program has 3 settings: time setting, distance setting and calories setting. When you start to enter manual mode the time window indicates 0:00;

9



- c): By Pressing mode key under manual mode, you can enter into time count down mode. Time window lights up and indicates preliminary time 30:00. Press start to run the machine
- d): Press mode key under time count down mode, enter into distance count down mode. Window lights up and indicates preliminary distance 1.0. Pressing speed +/-you can set distance count down, ranging 1.00-99.00-1.0-...;
- e): Press mode key under distance count down mode, you can enter into calories count down mode. Window lights up and indicates preliminary calories 50. Press speed +/- or incline +/-, you can set calories count down, ranging 20-990CAL···;
- f): The window will display "END" after stopping the time countdown, distance countdown and calories countdown program.

4). Manual program operation

- a): Press start key, time count down 5 seconds, then treadmill will start to work with initial speed 1km/h;
- b): Press speed+/-, you can adjust speed;
- c): Press incline+/-, you can adjust incline;
- d): Press stop, you can stop treadmill at working state;
- e): Press quick speed key, you can quickly adjust the speed you want;
- f): Press quick incline key, you can quick adjust the incline you want;
- g): By pulling out safety key, you can stop the treadmill urgently. Speed window indicates "E-07" and beeper warns a second;
- h): When you set the time gradually decreases to zero, speed slows down until stop, Time window indicates END, beeper warns once a second, then display turns back to P0 state:
- I): When you set the distance gradually decreases to zero, speed slows down until stop, distance window indicates END, beeper warns once a second, then display turns back to P0 state;
- j): When you set the calories gradually decreases to zero, speed slows down until stop, calories window indicates END, beeper warns once a second, then display turns back to PO state

5). Program mode

- a): Press program key, you can enter into automatic program.
- b): Press start key, you can start treadmill at the speed of program set;
- c). Press speed+/-, you can adjust speed;
- d). Press incline+/-, you can adjust incline;
- e). Press quick speed key, you can quickly adjust the speed you want:
- f). Press quick incline key, you can quick adjust the incline you want;
- q). Every program has 10 segments, every segment working time is 1/10 of set time;
- h) When transferring from one segment to another, you'll hear 3 beeps.
- I). Press stop key, you can stop working the treadmill;
- j). When set time gradually decreases to zero, speed slows down until stop, beeper warns a second, then display turns back to P0 state:
- k). Pulling out safety key, you can stop working treadmill urgently. Speed window display"---"
- I): Program chart

TIME INTERVAL											
mode			set	time /	/ 10 =	ever	y grad	de tim	ie		
		1	2	3	4	5	6	7	8	9	10
P1	SPEED	3	3	6	5	5	4	4	4	4	3
	INCLINE	0	3	3	3	4	4	4	1	1	0
P2	SPEED	3	3	4	4	5	5	5	6	6	4
	INCLINE	2	2	2	3	3	3	3	4	4	2
P3	SPEED	2	4	6	8	7	8	6	2	3	2
	INCLINE	3	5	4	4	3	4	4	3	4	2
P4	SPEED	3	3	5	6	7	6	5	4	3	3
	INCLINE	0	3	3	2	2	5	5	3	3	2
P5	SPEED	3	6	6	6	8	7	7	5	5	4
	INCLINE	3	5	3	4	2	3	4	2	3	2
P6	SPEED	2	6	5	4	8	7	5	3	3	2
	INCLINE	3	4	5	6	3	5	5	6	4	3
P7	SPEED	2	9	9	7	7	6	5	3	2	2
	INCLINE	0	3	3	3	4	4	4	1	1	0
P8	SPEED	2	4	4	4	5	6	8	8	6	2
	INCLINE	1	1	4	4	4	5	5	4	3	2
P9	SPEED	2	4	5	5	6	5	6	3	3	2
	INCLINE	3	5	3	4	2	3	4	2	3	2
P10	SPEED	2	5	7	5	8	6	5	2	4	3
	INCLINE	1	5	6	8	12	9	10	9	5	3
P11	SPEED	2	5	6	7	8	9	10	5	3	2
	INCLINE	3	5	6	8	6	5	8	7	5	2
P12	SPEED	2	3	5	6	8	6	9	6	5	3
	INCLINE	5	7	5	8	6	5	9	10	6	2

6. Safety key function:

Pull off the safety key, the LCD windows show " \downarrow ", the buzzer sound "BIBI-BI" (the data of other windows keep unchanged). the motor will stop moving.

7. The display range of numerical value

TIME: 0:00 - 99.59(MIN)
DISTANCE: 0.00 - 99.9(KM)
CALORIES: 0.0 - 999 (C)
SPEED: 1.0 - 16.0(KM/H)
PULSE: 50-200(BPM)
INCLINE: 0-12%

8 .Pulse function:

It will display the heart rate within 5 seconds after turn on the power. The default is your actual heart rate, the range is 50-200 time/mintues. It will have the heart drawing during the testing. But the date just can be reference and can't be used as medical data.

9.Body Fat tester

At the beginning state, press "PROGRAM" continue entering FAT body fat tester, window display "FAT". Press "MODE" enter (F-1 SEX, F-2 AGE, F-3 HEIGHT, F-4 WEIGHT,), Press "SPEED+", "SPEED—" to set. Press "MODE" to set F-5,grasp the hand pulse, the window will display your body quality index, The body quality index is to test the relation between height and weight.

The body FAT suits for any male and female, to adjust the weight according it together with other body quality index. The idea FAT should be 20-25, if under 19, it means too thin. If between 25 and 29, it means overweight, if over 30, it means obesity. (The data is just for reference, can not be as medicinal data)

01	Sex	01 MALE 02 FEMALE	
02	Age	1099	
03	Height	100200	
04	Weight	20150	
05	FAT	≤19	Under weight
	FAT	= (2025)	Normal weight
	FAT	= (2529)	Over weight
	FAT	≥30	Obesity

10.Others

- a) The window displays "END" after running one countdown parameter, and every 2 seconds make $0.\,5$ second alarm sound until the treadmill stopped, then return to manual mode status.
- b) When setting one parameter, it can process cycle set. Such as the time setting range is $5\colon 00-99\colon 00$, when reach $99\colon 00$, press "+" again, back to $5\colon 00$ can cycle set. Add and subtract use "+" "-".
- c) Countdown time, countdown calorie and countdown distance, can set one of them, press last item to set running, the setting parameter is countdown, others display forward count.
- d) Accelerated speed is 0.5 km/s, deceleration is 0.5 km/s.

BELT ADJUSTMENT

BELT ADJUSTMENT

You may need to adjust the running belt during the first few weeks of use. All running belts are properly set at the factory. It may stretch or be off-center after use. Stretching is normal during the break-in period.

ADJUSTING THE BELT TENSION

If the running belt feels as though it is "slipping" or hesitating when you plant your foot during a run, the tension on the running belt may have to be increased.

TO INCREASE THE RUNNING BELT TENSION:

- A. Place 8MM wrench on the left belt tension bolt. Turn the wrench clockwise 1/4 turn to draw the rear roller and increase the belt tension.
- B. Repeat STEP A for the right belt tension bolt. You must be sure to turn both bolts the same number of turns, so the rear roller will stay square relative to the frame.
- C. Repeat STEP A and STEP B until the slipping is eliminated.
- D. Be careful not to tighten the running belt tension too much as you can create excessive pressure on the front and rear roller bearings. An excessively tightened running belt may damage the roller bearings that would result in bearing noise from the front and rear rollers.


TO DECREASE THE TENSION ON THE RUNNING BELT, TURN BOTH BOLTS COUNTER-CLOCKWISE THE SAME NUMBER OF TURNS.


CENTERING THE RUNNING BELT

When you run, you may push off harder with one foot than with another. The severity of the deflection depends on the amount of force that one foot exerts in the relation to the other. This deflection can cause the belt to move off-center. This deflection is normal and the running belt will centre when no body is on the running belt. If the running belt remains consistently off-center, you will need to centre the running belt manually.

- A). Start the treadmill without anyone on the running belt, press (SPEED UP) bottom until speed reaches 6kph.
- B). Observe whether the running belt is toward the right or left side of the deck.
- a. If toward the left side of the deck
 Using wrench, turn the left adjustment bolt clockwise 1/4 turn and the right adjustment bolt counterclockwise 1/4.
- b. If toward the right side of the deck
 Using wrench, turn the right adjustment bolt clockwise 1/4 turn and the left adjustment bolt counterclockwise 1/4.
- c. If the belt is still not centered, repeat the above steps until the running belt is on center.
- C). After the belt is centered, increase the speed to 16kph and verify that it is running smoothly. Repeat the above steps if it is necessary.

If the above procedure is unsuccessful in resolving the off-center, you may need to increase the belt tension





CARE & MAINTENANCE

WARNING!:To prevent electrical shock, be certain the treadmill is turned off and unplugged before cleaning or routine maintenance.

RUNNING BELT AND RUNNING DECK LUBRICATION

For maximum treadmill life, this treadmill needs a routine lubrication as part of a general maintenance for the machine. The routine maintenance procedure will prevent premature wear of the running belt, running deck and drive motor system. The recommended lubrication schedule as:

USAGE	LUBRICATION
1~6kph	Every 6 months
6~12kph	Every 3 months
12~16kph	Every 2 months

Lubricant for running deck

This schedule is the recommended application for a single user, up to 20~30 minutes per time. 3~4 times per week. For lubrication, you can contact your dealer.

CLEANING

Perspiration should be wiped from the console and treadmill surface after your workout. You should wipe down your treadmill once a week with a water dampened, soft cloth. Be careful not get excessive moisture on the display panel as this might cause an electrical hazard or electronics to fail.

STORAGE

Store your treadmill in a clean and dry environment. Ensure the master power switch is off and is un-plugged from the electrical wall outlet.

MOVING

This treadmill has been designed and equipped with wheels for easy mobility. Before moving, ensure the master power switch is in the off position and the power cord is unplugged from the electrical outlet.

FOR CONSUMER/HOME USE ONLY!!

This treadmill is designed for home use only. Do not use for light institutional or commercial.

LUBRICATION MAINTENANCE

It is important to take good care of your treadmill deck (the walking surface underneath the belt). A good silicone lubrication will also improve the performance of your treadmill.


NOTE: Use the silicone that is supplied with the treadmill. Additional HEALTHSTREAM silicone lubricant can be purchased from your retail store.

WARNING: STOP the treadmill and remove the safety key before lubricating the running deck.

HOW TO SPRAY SILICONE ON DECK?

- A). Find the silicone bottle. It is located in the hardware kit package included with this treadmill..
- B). Find a straw and put it onto the silicone bottle as the drawing shows.
- C). Spray silicone evenly on treadmill deck as the drawing shows. (ATTENTION: The treadmill MUST BE STOPPED before applying the silicone lubricant. This is to prevent injury, otherwise the edge of the running belt may cut you or your fingers could be crushed by the rollers.)


Do not put too much silicone on the deck. Excessive lubricant may cause slippage of the belt on the rollers

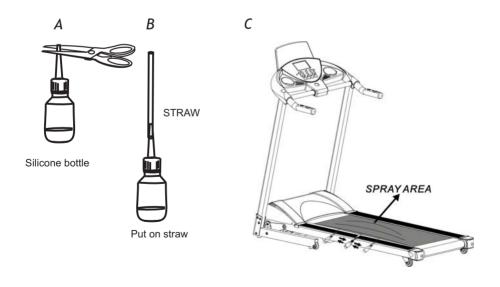

TROUBLE SHOOTING

Fault Code	Fault Description	Fault Processing
E1	The computer has abnormal communication after starting	The control board stops and enters into error code. The console will display "E1" and beeps 3 sounds
		Possible Reasons: Communication Abnormal: The control and computer has abnormal communication after start
E2	The motor wire connect badly	The computer shows fault code "E2". After 10 seconds it will revert back to the ready mode and can be restarted. Possible reason; check the motor wire is connected well Put Computer shows fault code "E2". Other areas
		show blank. After 10 seconds will go into ready mode, and can restart.
	No Speed Wireless Sensor Network	Possible Reasons: Can't receive the motor speed sensor feedback above three seconds, please check sensor plug and motor connect wire and the controller.
E3	Current overload Protection :	Computer shows fault code "E3". Other areas show blank. After 10 seconds, the treadmill will go into ready mode and can be restarted.
		Possible Reasons: An overloaded electrical surge will send the machine into self preservation mode. Check that there is no burning smell coming from the motor, If yes, please call the service number located on the front cover of this manual. Make sure the power and voltage comply with the standard,
E6	Explosion-Proof Protection : Some unusual condition of power or voltage that cause damage to the motor drive circuit.	· ·

EXPLODED DRAWING

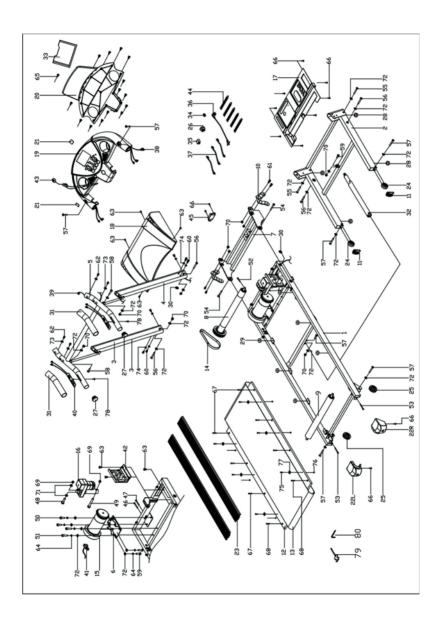

PARTS LIST

NO.	DESCRIPTION	REMARK	QTY	NO.	DESCRIPTION	REMARK	QTY
1	MAIN FRAME		1	24	TRANSPORT WHEEL	i 60.2*; 601.5*20	2
2	BASE FRAME		1	25	ADJUSTABLE WHEEL	∮9*¡ 6⁄2 *23.5	2
3	LEFT UPRIGHT		1	26	POWER SWITCH	250V/15A RED	1
4	RIGHT UPRIGHT		1	27	INNER END CAP	§ 38 *t1.5	2
5	COMPUTER BRACKET		1	28	FOOT PAD	§ 35*15*(M6*10)	4
6	MOTOR BRACKET		1	29	BLUE CUSHION PAD	§ 6.2*¡ Ś00*10	6
7	INCLINE BRACKET		1	30	RING PROTECTING WIRE PLUG	§ 12*; Ó8*; Ó24*9	3
8	FRONT ROLLER		1	31	HANDRAIL COVER	§ 37*i ∮ 4*257	2
9	REAR ROLLER		1	32	CYLINDER	F=35kg	
10	STAMPING PARTS		4	33	MANUAL STORAGE		1
11	BUSHING		4	34	POWER WIRE BUCKLE	6N3-4	1
12	RUNNING BOARD	t15*515*1130	1	35	OVERLOAD PROTECTER	10Amp 125/250VAC	1
13	RUNNING BELT	1200*420*1.6mm	1	36	POWER PLUG	13A/250V	1
14	BELT	200-J7	1	37	SINGLE LINE	10A *150mm	3
15	DC MOTOR		1	38	COMPUTER UP WIRE	170mm wire	1
16	INCLINE MOTOR		1	39	COMPUTER BOTTOM WIRE	1500mm wire	1
17	MOTOR BOTTOM COVER		1	40	HAND PLUSE	550mm wire	2
18	MOTOR TOP COVER		1	41	MAGNETIC SENSOR	500mm wire	1
19	COMPUTER TOP COVER		1	42	CONTROLLER		1
20	COMPUTER BOTTOM COVER		1	43	SAFETY KEY	red wire£ ¶100mm	1
21	BOLT COVER		1set	44	CABLE TIE	ST-100mm	5
22L	L END CAP		1set	45	SMALL COVER		1
22R	R END CAP		1set	46	BOLT	M8*65	1
23	SIDE RAIL		2	47	BOLT	M8*50	1

PARTS LIST

NO.	DESCRIPTION	REMARK	QTY
48	BOLT	M10*45	1
49	BOLT	M10*90	1
50	ROUND HEAD HEX BOLT	M8*20	2
51	ROUND HEAD HEX BOLT	M8*35	2
52	ROUND HEAD HEX BOLT	M6*45	1
53	ROUND HEAD HEX BOLT	M6*60	2
54	HALF-ROUND HEAD HEX BOLT	M10*30	2
55	HALF-ROUND HEAD HEX BOLT	M8*55	2
56	HALF-ROUND HEAD HEX BOLT	M8*50	4
57	HALF-ROUND HEAD HEX BOLT	M8*45	3
58	HALF-ROUND HEAD HEX BOLT	M8*40	6
59	HALF-ROUND HEAD HEX BOLT	M8*25	1
60	HALF-ROUND HEAD HEX BOLT	M8*15	6
61	HALF-ROUND HEAD HEX BOLT	M8*18	4
62	HALF-ROUND HEAD HEX BOLT	M6*30	4
63	CROSS HEAD BOLT	M5*10	7
64	SPRING WASHER	i 6).1*i 6 (2.3*t2.1	6
65	CROSS HEAD SELF TAPPING BOLT	ST4.2*15	15
66	CROSS HEAD SELF TAPPING SCREW	M4*15	6
67	CROSS HEAD BOLT	M6*30	6
68	CROSS HEAD BOLT	M6*20	2
69	LOCK NUT	M10	4
70	LOCK NUT	M8	14
71	WASHER	i Φ1*; 2 0*t2.0	2

NO	. DESCRIPTION	REMARK	QTY
72	WASHER	i 9 °i 0 6*t1.6	18
73	WASHER	i 6 0.6*; 6 02*t1.6	4
74	INNER WASHER	i Ó 4.5*i Ó .4*t0.8	6
75	BOLT	M5*25	6
76	SCREW NUT	M5	6
77	WASHER		6
78	CROSS HEAD SELF TAPPING SCREW		2
79	ALLEN KET WRENCH		1
80	SCREW DRIVER		1